

Notes

Refer to Specifications Q10, Q25, Q31 and Q50.

Refer also to Engineer's Specification and Drawings.

Refer also to Lighting Consultant's drawings for detailed information on light fittings.

MATERIALS PALETTE

Granite setts

- Dark granite bands
- Blister paving
- Reclaimed Yorkstone paving
- 'Pineapple' paving
- Shaped granite bollard
- Granite rumble strips / ramps
- New tarmac carriageway
- Tarmac surface to match existing pavement Granite kerb

Bus Stops: Contractor to provide attendance for 10no. existing, relocated by JCDecaux

Litter Bins: 20no. Half-jumbo (85L) in stainless steel by Larkin Street Products, Galway locations to be agreed on site

Cycle racks: 12no. Zenith Cycle Stands in satin polished stainless steel by Furnitubes, Greenwich locations to be agreed on site

Rev F - 10.12.10 Revised Bishop's Way crossing and underpass. Tree removed

Rev E - 30.09.10 Revised Bishop's Way ramp

CONTRACT ISSUE Rev D - 17.09.10 Updated layout.

'Pineapple' paving added. Rev C - 03.08.10 Amendments to King Street Middle Row, Mill St junction and crossing locations

Rev B - 04.06.10 *Wider crossings. New seats*

Rev A - 21.04.10 *Amendments to bus stop* and trees within King Street

Date 01.12.09

Scale

1 : 500 @ A1 (height)


Revision F

Drawing No. 100

Drawing Title Site layout proposals

Project Maidstone High St Improvement Project

Studio 10 Ayr Street Workshops Ayr Street Nottingham NG7 4FX

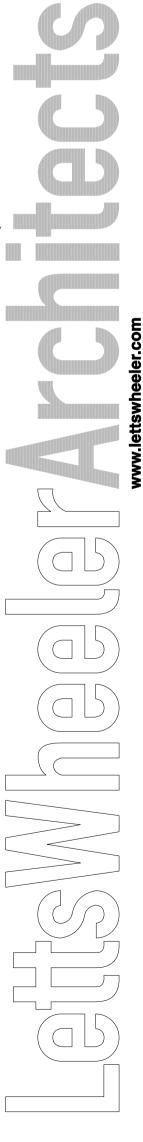

Telephone 0115 911 0734 Facsimile 0115 911 0734